



Epson's unique inkjet printer with tractor feeder delivers unsurpassed durability, endurance and printout quality to withstand the demanding conditions of the chemical and logistics industries. With the reliability to last 6x longer than conventional inkjet printers and exceptional ink capacity that allows longer continuous printing, frequent downtime will be a thing of the past.



GP-C830/M830



Print



High Capacity



High Speed
Printing



Power
Savings



Cost
Effective

ENGINEERED FOR BUSINESS

Assured reliability

Rated up to 600,000 pages in its lifetime.

High-capacity ink cartridges

Prints large volumes continuously with greater savings and reduced downtime.

Sharper printouts

Durable pigment ink lets you print without the worry of smudges and fading.

Whether it's the chemical or logistics industries, Epson's latest inkjet printer with a tractor feeder is built to meet the toughest label printing specifications. With a long life suited for high print volume operations, high-capacity ink cartridges and sharp printouts on ultra-durable ink, business will run as reliably as your next printout.



Uninterrupted Heavy-duty Performance with Reduced Downtime

Assured Reliability

Epson's GP-C830/M830 inkjet printers are tough enough to handle the needs of industries and medical institutions that cannot afford downtime. With an impressive lifecycle of 600,000 pages* – 6x longer than conventional inkjet printers – downtime is dramatically reduced while the bottom line is improved with a lower total cost of ownership.

* When printing on 241.3 mm x 279.4 mm (9.5" x 11") paper. Varies depending on usage environment, print pattern and type of paper used.

Easy Paper Handling

Even the best printers jam. With Epson technology, clearing paper jams is quick and fuss free. The GP-C830/M830 automatically releases paper guide when a jam is detected, allowing for the rapid removal and re-setting of media. Manual release can also be performed with a simple one-touch operation. Additionally, the top cover slides open easily for quick removal and print restart.


Revolutionary Print-head Protection

Printers that use fanfold paper tend to collect paper dust on the print head, which results in frequent nozzle clogging and missing ink dots. Epson's new head protection system drastically reduces the accumulation of dust and dirt, providing longer continuous operation between periodic maintenance.


Paper-edge guide protects print head from paper dust.



Head-protection system



No head-protection system

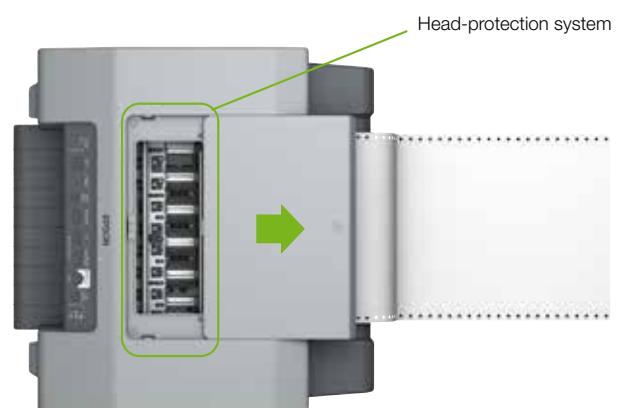

The top cover slides open – a convenient safety feature that stops operation.

Effortless Workflow and Operation


High-capacity Ink Cartridges

High-capacity ink cartridges enable affordable, large-volume printing while dramatically decreasing downtime spent changing cartridges, creating more uptime and less periodic maintenance. The GP-M830 is equipped with two black ink cartridges that are used simultaneously, doubling ink capacity and further decreasing downtime.



Built for Tough Work Environments

Built tough for demanding work environments, the GP-C830/M830 can withstand weights of up to 20 kg on the top. Comfortable side grips accommodating four fingers are also featured, making relocation easier.

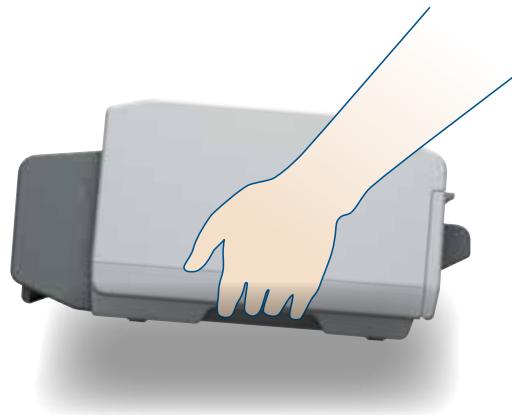


Outstanding Output and Durability

Sharper Printouts

Epson DURABrite™ Ultra produces high-quality prints that have excellent resistance to water, chemicals, fading and smudges. Durability like this makes GP-C830/M830 ideal for hospitals, laboratories, supermarkets and wherever liquids or other moisture is present.




Epson pigment ink



Epson pigment ink is not water soluble and firmly binds to media fibers, resisting water and other moisture.

Dye-based ink



Conventional dye-based ink is water soluble so printouts can be negatively affected by water and other moisture.

Barcodes are Clear and Sharp

Installing the included printer driver automatically loads fonts for barcode printing, assuring razor-sharp barcodes even on plain paper.

Barcode print comparison (end of ink supply)



GP-C830/M830



Conventional dot impact printer

Crisp, high-density barcodes are printed consistently until the ink runs out.

Faint, low-density barcodes when the ribbon is nearly used up exhibit decreased readability.

High Output that Reduces Costs

The GP-C830/M830 shines in workplaces where fast printing is vital – with a fast 19.7* ppm for GP-C830/M830. Overall running costs are lower compared to laser printers.

* Super draft mode.

Reduced Noise and Power Usage

Unlike conventional dot impact printers, GP-C830/M830 inkjet printers operate quietly and do not contribute to workplace noise. In addition, they also consume less energy, which is a huge advantage for energy-conscious offices and in areas with inconsistent power supply.

PARTNERS IN PERFECTION

Our four colors are:



C13S020559
GJIC4 (K) INK BLACK



C13S020560
GJIC4 (C) INK CYAN



C13S020561
GJIC4 (M) INK MAGENTA



C13S020562
GJIC4 (Y) INK YELLOW


Save more with Epson individual cartridges

Enjoy greater savings with Epson's cost-effective ink cartridges. You can now maximize the usage of your ink cartridges by only replacing the empty cartridge, allowing for continuous printing.

MODEL NUMBER	GP-C830 (Color model)		GP-M830 (Monochrome model)
Print Technology	MicroPiezo® ink jet technology		
Print Resolution			
Plain Media	Up to 720 x 720 dpi		
Glossy Media	Up to 5760 x 1440 dpi ¹⁾		NA
Ink Cartridge	Pigment ink		
Individual Cartridges	Black	GJIC4(K) x 1	GJIC4(K) x 2
	Cyan	GJIC4(C) x 1	NA
	Magenta	GJIC4(M) x 1	NA
	Yellow	GJIC4(Y) x 1	NA
Print Speed²⁾			
Super Draft Mode	19.7 ppm		
Draft Mode	19.7 ppm		
Normal Mode	18.1 ppm		
Fine Mode	10.2 ppm		
Extra Fine 1 Mode	3.5 ppm		
Extra Fine 2 Mode	3.5 ppm		NA
Extra Fine 3 Mode	1.3 ppm		NA
Paper Feeding Method	Push tractor feed (rear in / front out)		
Paper Feed Speed	Continuous feed 66.7ms / inch		
Media Form	Continuous with sprocket holes		
Media Type	Plain, Glossy, Medicine Bag, Plain Label, Matte Label, Synthetic Label, Glossy Label	Plain, Medicine Bag	
Media Dimension			
Width	76.2 - 241.3 mm (3" - 9.5")		
Length ³⁾	12.7 - 558.8 mm (0.5" - 22")		
Thickness ⁴⁾	0.065 - 0.14 mm (0.0025" - 0.0055")		
Weight (1000 sheets) ⁴⁾	45 - 110 kg		
Printable Area			
Maximum Printable Area Width	203.2 mm (8")		
Left Margin	13.0 mm (0.51")		
Right Margin	13.0 mm (0.51") ⁵⁾		
Top Margin	2.0 mm (0.08")		
Bottom Margin	2.0 mm (0.08")		
Barcode Font (Printer Driver Built-in)			
Barcode	Code 39, Code 128, Interleaved 2 of 5		
Two-dimensional Code	QR Code		
Barcode Font (ESC/P Command)	EAN-13, EAN-8, Interleaved 2 of 5 (ITF), UPC-A, UPC-E, Code39, Code128, POSTNET		
Interface	USB 1.1 / 2.0 Parallel (IEEE-1284 Compatibility mode, Nibble mode) LAN 100BASE-TX/10BASE-T		
Operating Temperature / Humidity	10 - 35 °C / 20 - 80 % RH		
Storage Temperature / Humidity	-20 - 40 °C / 5 - 85 % RH		
Reliability			
Total Print Volume	0.6 million sheets [Paper size: 241.3 x 279.4 mm (9.5" x 11")]		
Overall Dimensions (D x W x H)	465 x 464 x 224 mm		
Weight	Approx. 12.2kg (without ink cartridge)		
Power Consumption			
Printing	Approx. 33W (mean, ISO/IEC 10561 letter pattern)		
Standby	Approx. 8W (in sleep mode approx. 2.9W)		
Rated Voltage	AC 110 - 240 V (AC adaptor)		
Rated Frequency	50 - 60 Hz		
Acoustic Noise			
Silent Feed ON	Approx. 48 dB(A)		
Silent Feed OFF	Approx. 54 dB(A)		
EMC Standards	CNS13438 Class A		
Safety Standards	FCC (Class A), UL/C-UL, EN60950, CE Marking (EMC Directive (Class A), VCC1 (Class A), Singapore Safety Standard		
Operating System	Microsoft® Windows® XP 32bit (SP3) / 64bit (SP2) Microsoft® Windows Vista® 32bit / 64bit (SP2) Microsoft® Windows® 7 32bit / 64bit Microsoft® Windows Server® 2003 Microsoft® Windows Server® 2008 / 2008 R2 Microsoft® Windows® 8 32bit / 64bit Microsoft® Windows Server® 2012 (64bit)		

Dimensions & Weight

Weight: Approx. 12.2 kg (28.89lbs)



dpi: Dots per 25.4mm (dots per inch)
ppm: Pages per minute

¹⁾ Print mode: Extra Fine 3 Mode

²⁾ The print speed measured based on paper size of 9.5" x 11".

³⁾ Printing on continuous paper when 139.7mm (5.5") or less is not supported.

⁴⁾ Plain paper

⁵⁾ When paper width is 229.2mm or wider, the width of the printable area remains at 203.2mm (max.) and the right margin expands up to 25.1mm, depending on paper width.

©2013 Epson Singapore Pte Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.

EPSON and EXCEED YOUR VISION are registered trademarks of Seiko Epson Corporation.

All other product names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners.

Epson disclaims any and all rights in those marks. Print samples shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Information correct at time of printing
Printed October 2013



Official Partner
of Manchester United